

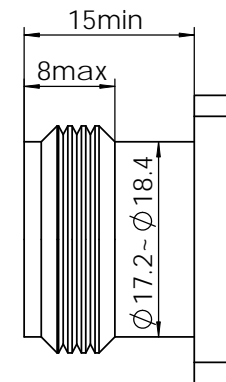


REVISIONS		
REV	DESCRIPTION	DATE
1	Add note 6	2020.1.2

## Installation instruction

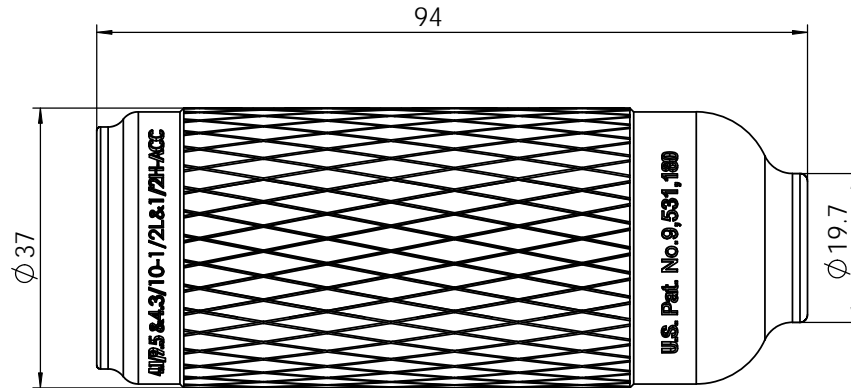

receptacle(female)  
connector requirement

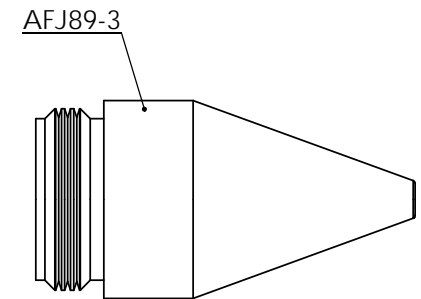

optional accessory

1. UV resistant (1120W/960 h)
  2. Life: 10 years
  3. Working temperature: -55 °C~+155 °C
  4. Acid alkali resistant
  5. Waterproofing standard IP68
  6. This boot can be installed **before** and **after** cable jumper assembly.
- \* Optional asscessory: with guide AFJ89-3, this boot can be installed **after** cable jumper assembly.

DRAWN	TITLE			<h3 style="text-align: center;">Amphenol</h3> <small>AMPHENOL FUYANG CO.,LTD CHANGZHOU, CHINA</small>		
CHECKED	WPS boot,4.1/9.5 male &4.3/10 male for 1/2" superflex and 1/2" annular cable					
APPROVED	SHEET	SCALE	METRIC	PART NO.		
	1/1	1.5/1	mm	AF2040567		
				AFS-2040567		
				1	1	1